



# EPT12-EZ

## Electric Pallet Truck 1.2t



- Small cost difference, yet transformed user experience: switch from a hand pallet truck to the EPT12-EZ!
- Standard Lithium Ion battery, lifetime maintenance free.
- CAN-BUS system simplifies operation and maintenance.

**EP EQUIPMENT CO.,LTD**  
[www.ep-ep.com](http://www.ep-ep.com)

## FEATURE

- **Low service weight yet decent capacity, suitable for anywhere a hand pallet truck can be used:**  
120kg Ultra-light service weight, 1200kg rated capacity, come and go freely in small working areas with a tiny 1390mm turning radius.
- **CAN-BUS system:**  
CAN-BUS system simplifies operation and maintenance, improves system reliability.
- **Patented integrated design:**  
Innovative sealed hydraulic unit - low noise and easy maintenance.
- **Patented non-contact limit switch design:**  
New patented contactless limit switch design, improves reliability.
- **Safety:**  
Convenient emergency stop, robust drive wheel cover and battery clip all help to ensure safety and reliability.

- **Battery:**  
3.7kg battery replacement, optional standby battery for extended run time.
- **Patented handle design:**  
New patented tiller handle, with ultra ergonomic controls.
- **Patented frame design:**  
New patented frame design combines low weight with high strength.
- **Patented key switch design:**  
New patented key switch, with integrated u-disk function.
- **Easy maintenance:**  
Maintenance-free design for end users, with simple troubleshooting and repair guides freely available to eliminate expensive service technicians.  
SMART panel shows current operation and troubleshooting status.

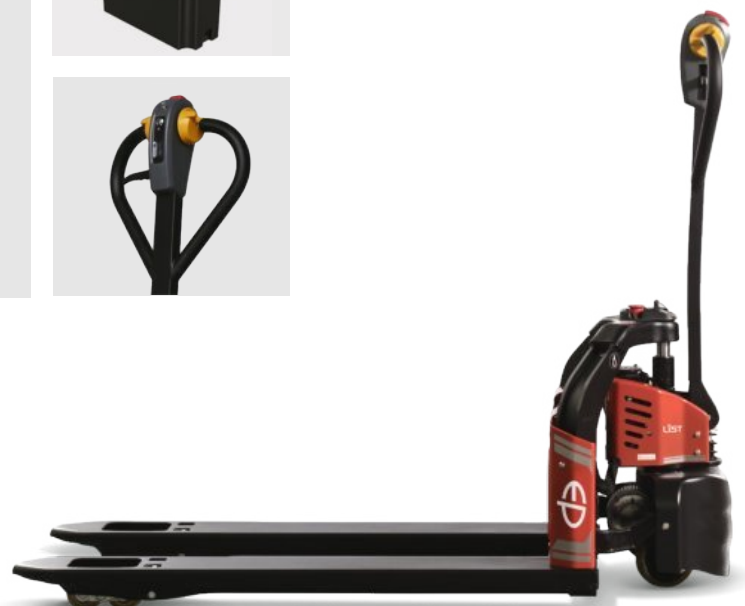

# Electric Pallet Truck 1.2t

## EPT12-EZ

Distinguishing mark				
1.1	Manufacturer			EP
1.2	Model designation			EPT12-EZ PRO
1.3	Power unit			Battery
1.4	Operator type			Pedestrian
1.5	Load capacity	Q	kg	1200
1.6	Load centre	c	mm	600
1.8	Axle centre to fork face	x	mm	950(880)
1.9	Wheelbase	y	mm	1190(1120)
Weights				
2.1	Service weight (include battery)		kg	130
2.2	Axle loading with load,driving side/loading side		kg	420/910
2.3	Axle loading without load,driving side/loading side		kg	110/20
wheels/tyres				
3.1	Tyre type driving wheels/loading wheels			PU/PU
3.2	Tyre size, driving wheels (diameter×width)		mm	Φ210×70
3.3	Tyre size, loading wheels (diameter×width)		mm	Φ80×60( Φ74×88)
3.5	Wheels, number driving/loading (x=drive wheels)		mm	1x/4(1x/2)
Dimensions				
4.4	Lift height	h <sub>3</sub>	mm	115
4.9	Height of tiller arm in driving position, min./max.	h <sub>14</sub>	mm	750/1190
4.15	fork height,lowered	h <sub>13</sub>	mm	80
4.19	Overall length	l <sub>1</sub>	mm	1540
4.20	Length to fork face	l <sub>2</sub>	mm	390
4.21	Overall width	b <sub>1</sub>	mm	560(685)
4.22	Fork dimensions	sxexl	mm	53x150x1150
4.25	Outside width of the forks	b <sub>5</sub>	mm	560(685)
4.32	Ground clearance, center of wheelbase	m <sub>2</sub>	mm	27
4.33	Aisle width for pallets 1000 × 1200 crossways	Ast	mm	1640
4.34	Aisle width for pallets 800 × 1200 lengthways	Ast	mm	1840
4.35	Turning radius	Wa	mm	1390
Performance				
5.1	Travel speed, with/ without load		km/h	4/4.5
5.2	Lifting speed, with/ without load		m/ s	0.02/0.025
5.3	Lowering speed, with/ without load		m/ s	0.09/0.05
5.8	Max. gradeability, with/ without load		%	4/10
5.10	service brake			electric
Drive				
6.1	Drive motor rating 60 min		kW	0.65
6.2	Lift motor rating at 15%		kW	0.5
6.3	Battery Type			Li-ion
6.4	Battery voltage/rated capacity(5h)		V/Ah	24/26
6.5	Battery weight		kg	5.1
6.6	power consumption according to VDI cycle		KWh/h	0.25
	Charger			24V10A
	Optional battery pack capacity			24V 26Ah
others				
8.1	Type of drive control			DC
8.4	Noise at the driver's ear			<74
	Application			GENERAL

1.The parameters in the table are of the standard model. For more information, please contact us.  
2.The parameters are subject to change without notice.

# Electric Pallet Truck 1.2t

